

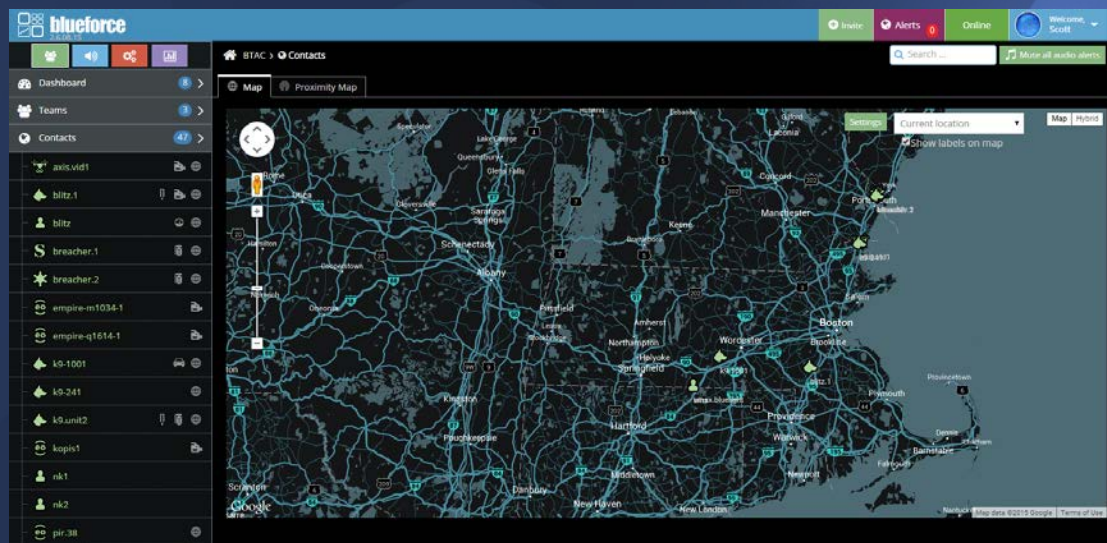



Blueforce TRAX

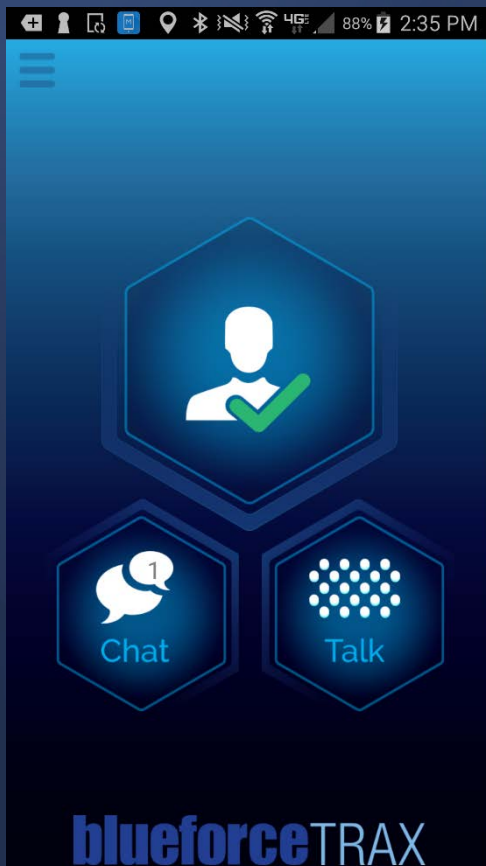


Getting Started

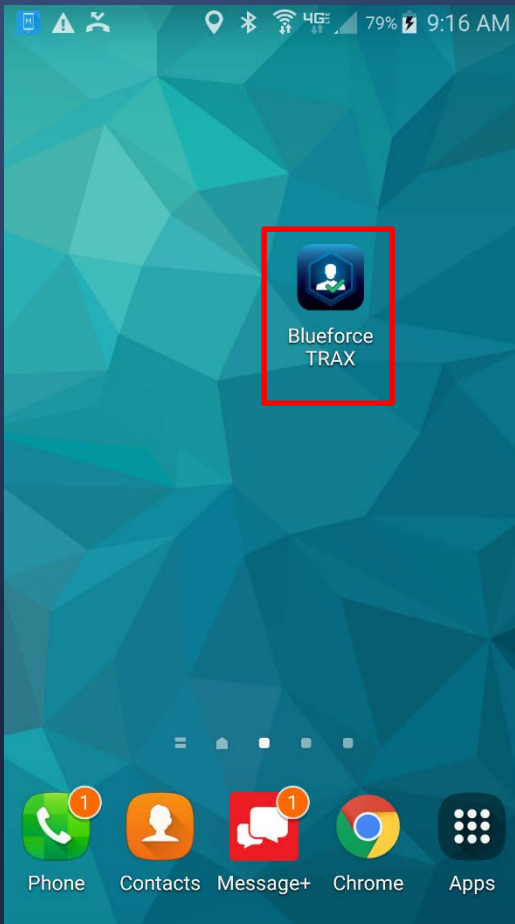

- Turn Device ON
 - Let it Boot and Find Signal
- From the Devices Home Screen, **SELECT** the Blueforce TRAX Icon
- **INPUT** your credentials and **SELECT** “SIGN IN”

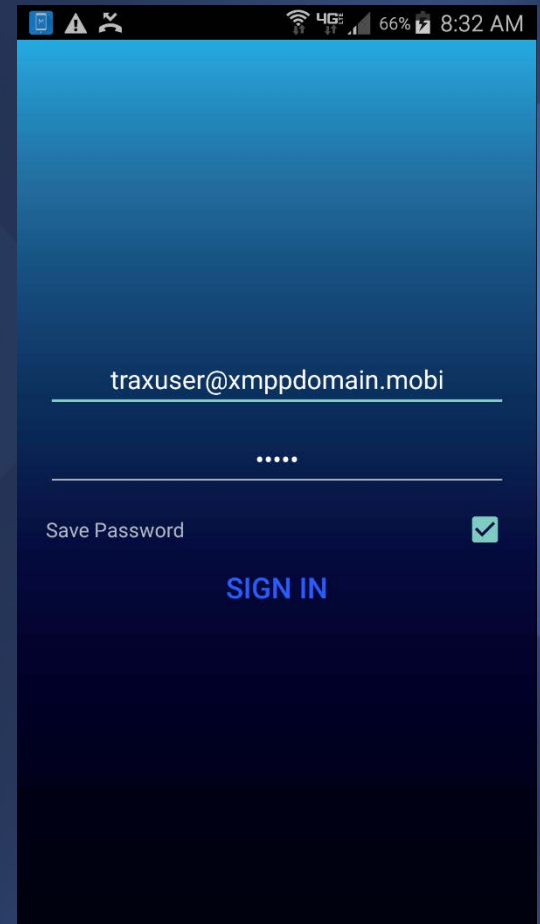


Getting Started

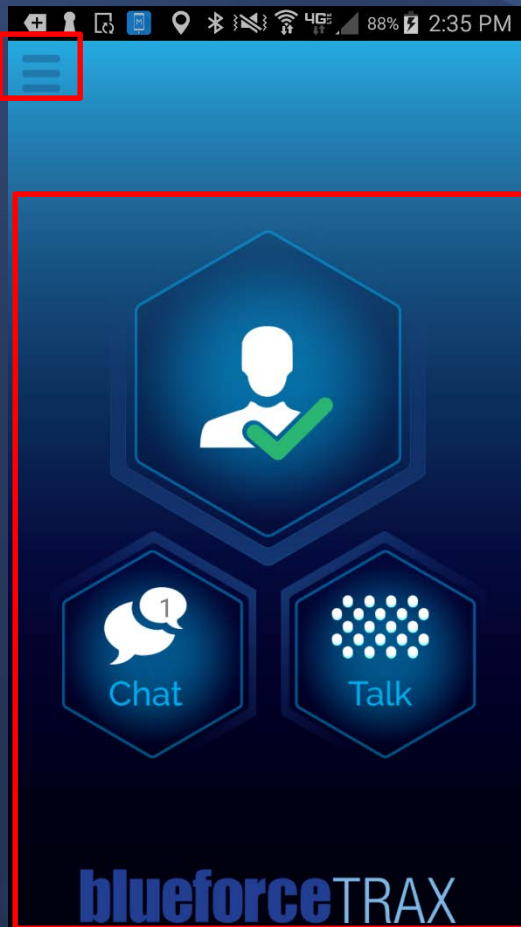


- The TRAX Homepage will display showing the Services that are available in each Hexagon
- At Center is the Status Hexagon
 - A GREEN Check = ONLINE
 - A GRAY Check = OFFLINE
 - A YELLOW Check = Checked In
- Bottom LEFT is the Chat Hexagon
 - Numerals will appear when a CHAT message is available
- Bottom RIGHT is the PTT Hexagon
 - PTT Feature is currently under Development
- The three (3) horizontal lines in the top left of the screen give access to the TRAX Settings
 - SELECT to VIEW the Settings Page


Check In/Check Out

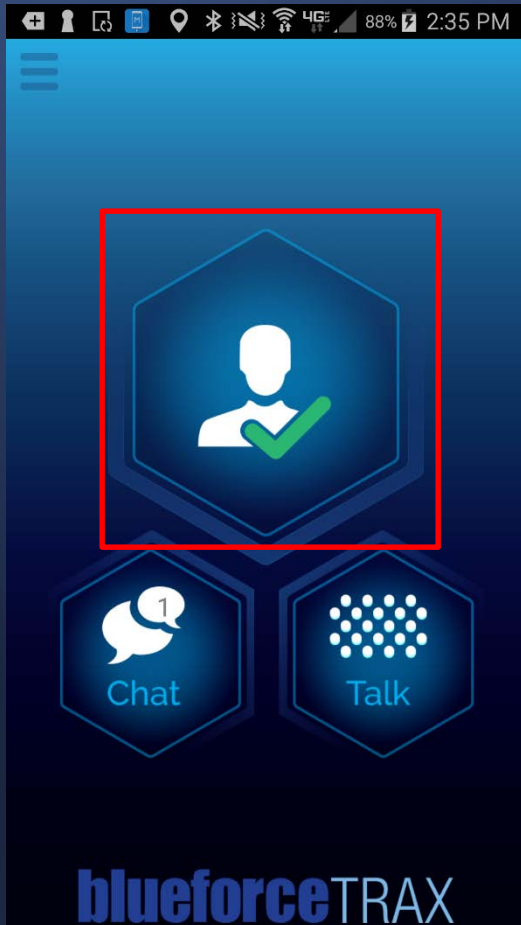


- TRAX allows a User to Check In and Check Out of appointments
- SELECT the CENTER Hex to bring up the Check In Screen
 - ENTER your message
 - SELECT “Check In”

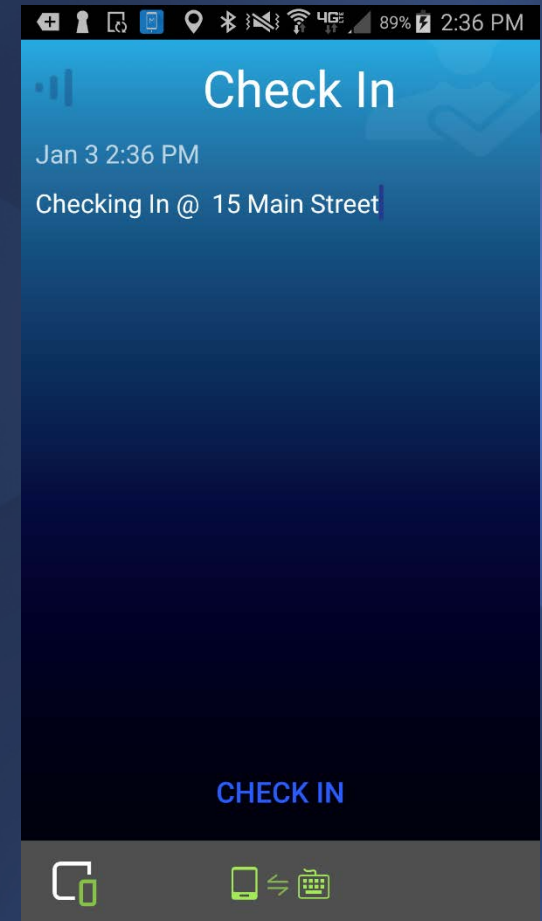


Check In/Check Out

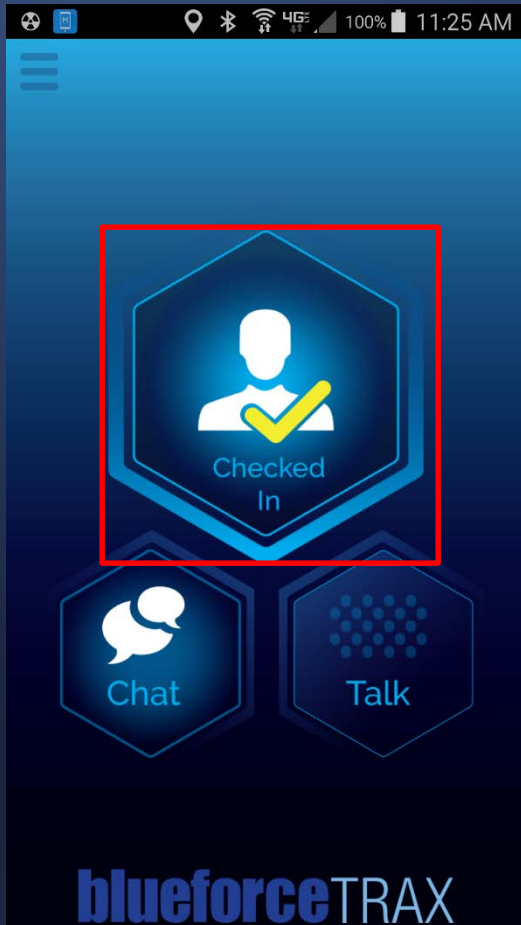

- A YELLOW Check will appear in the CENTER Hex and the words “Checked In” will appear below
- To CHECK OUT, SELECT the CENTER Hex
 - SELECT “CHECK OUT”

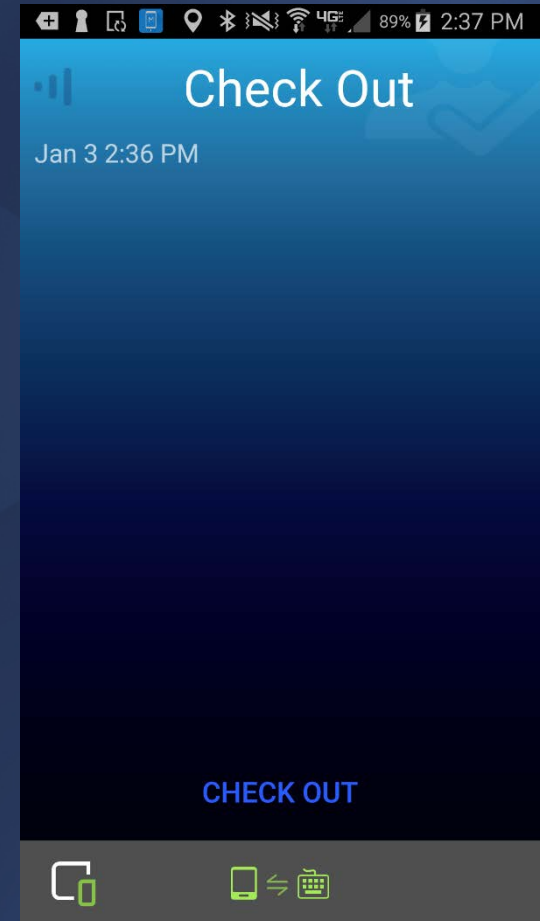



Check In/Check Out

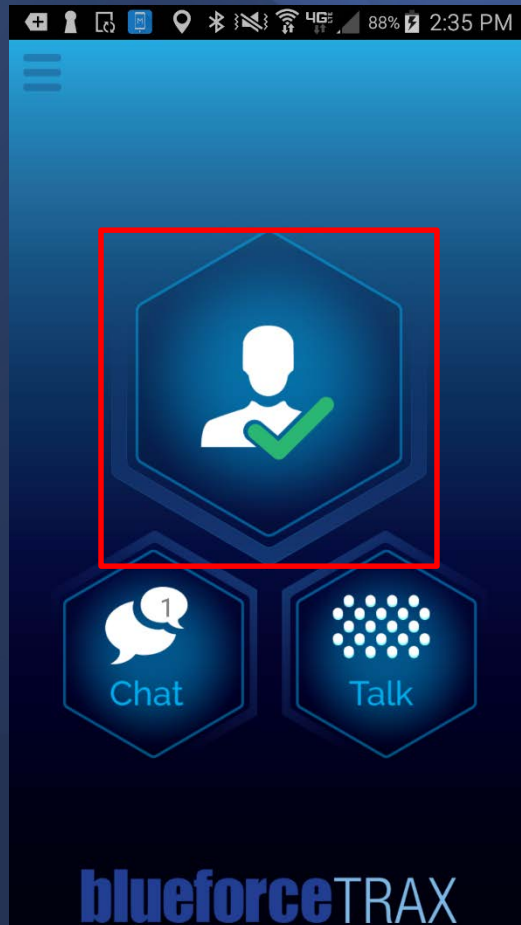

- The Status Hex will return to GREEN



Chat

- SELECT the Chat Hex
- VIEW your Chat History
- CREATE a new Chat message at the bottom of the screen
 - SELECT the Arrow to SEND
- SELECT the Back Arrow, Top Left, to return to the Home Screen

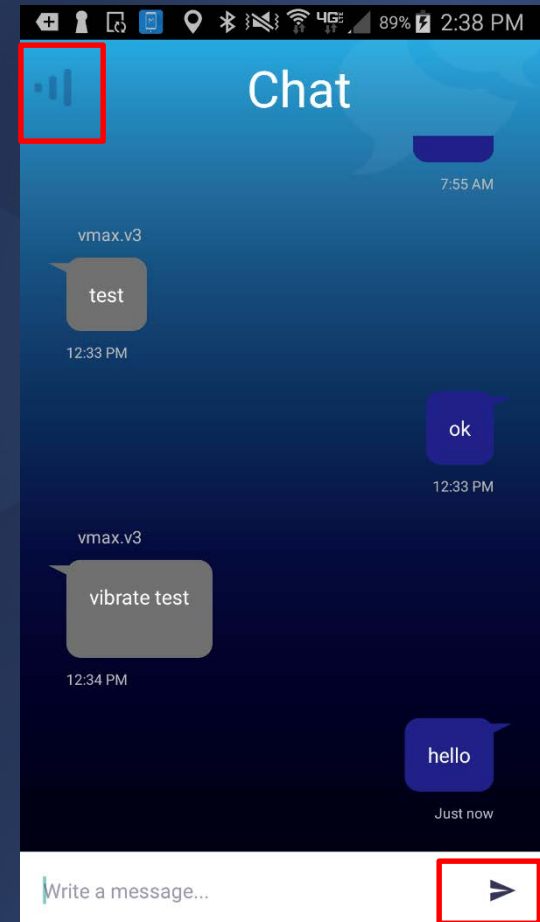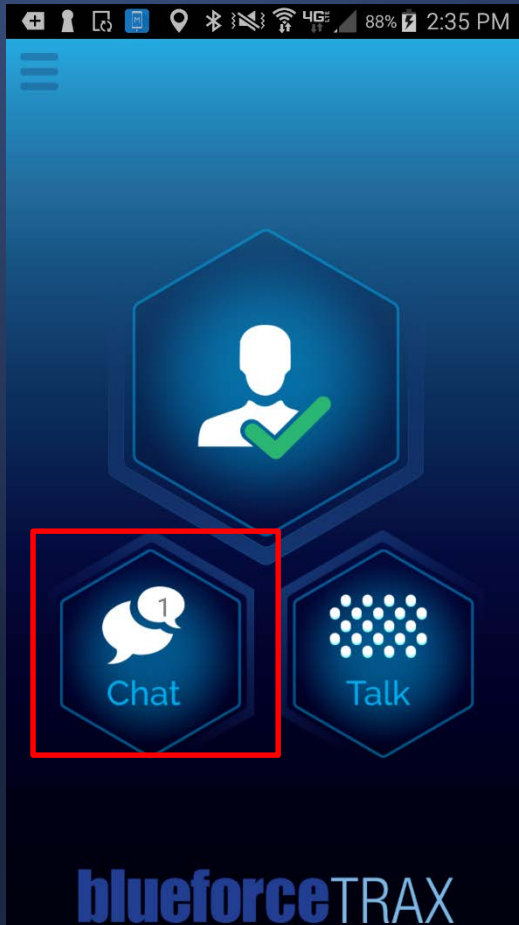


Settings

- On the Home Screen, **SELECT** the 3 horizontal lines, Top Left
- **SELECT** “Settings”
- The Settings Screen will appear(See Next Slide)

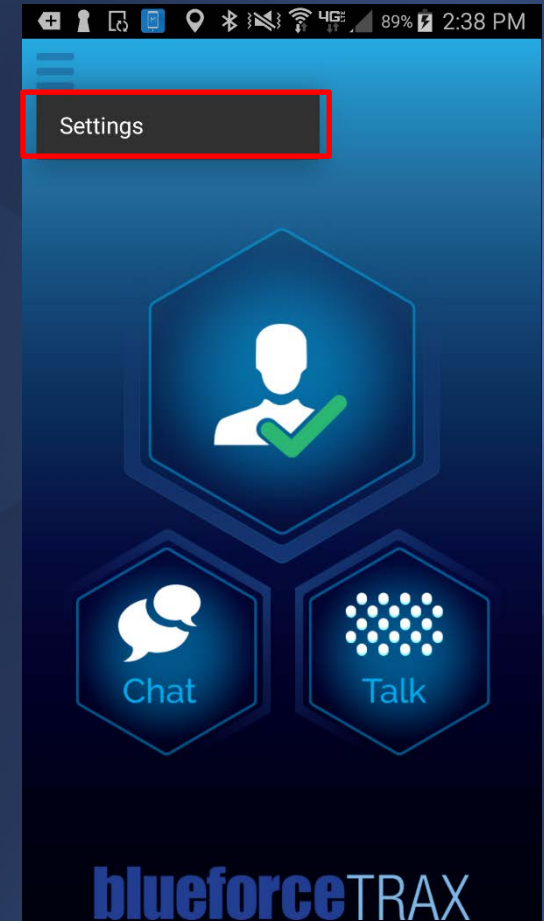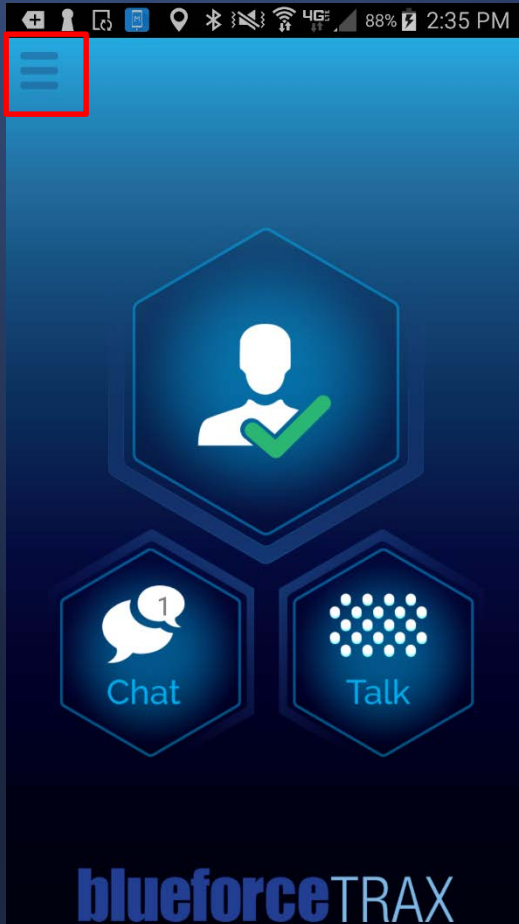

Settings


Main Settings

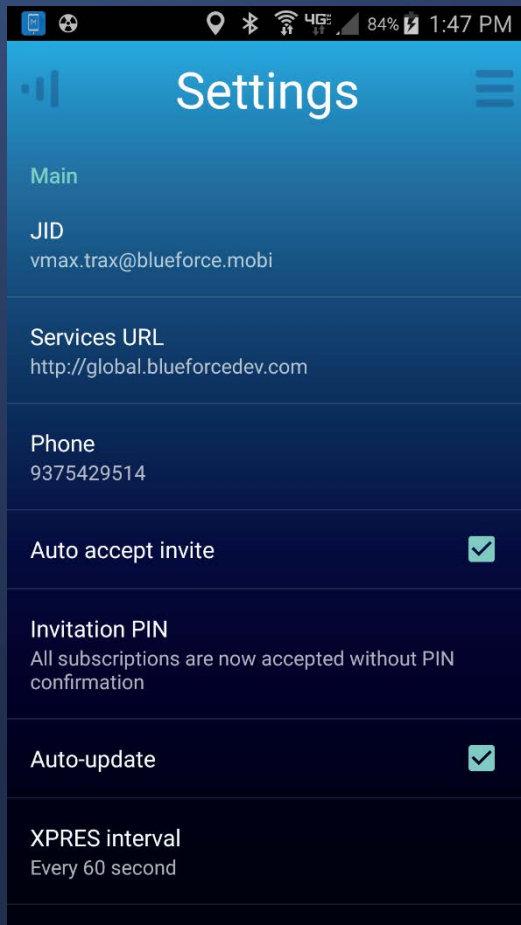

- JID = Your Username and XMPP Domain
- Services URL = Where your database, provisioning, and licensing information are located
- Phone = Your Phone Number

Settings


Main Settings

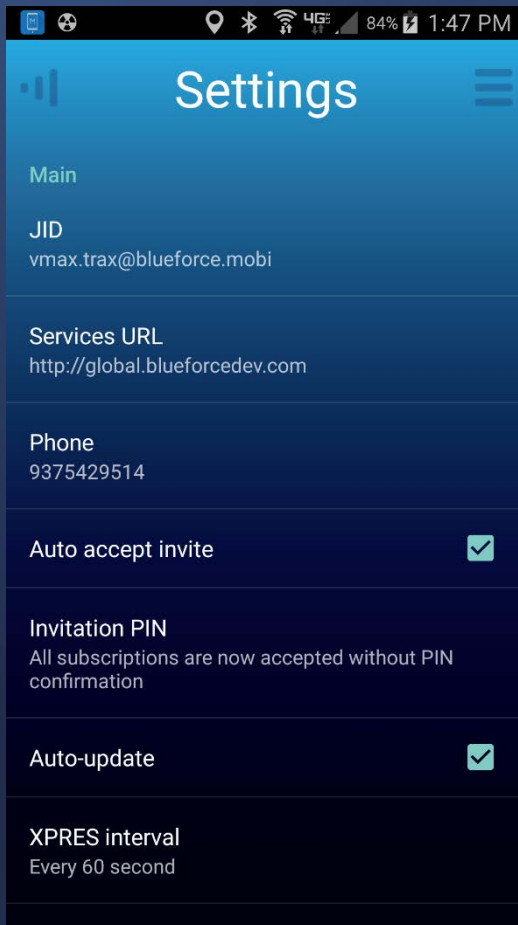

- Auto Accept Invite = ENABLE this to automatically accept subscription invitations from others. DISABLE this force others to utilize a 4-digit PIN when subscribing
- Invitation PIN = 4-digit PIN for others to use when subscribing
- Auto-update = Disregard, placeholder for future development
- XPRES Interval = The Interval at which your data is shared

Settings


Main Settings

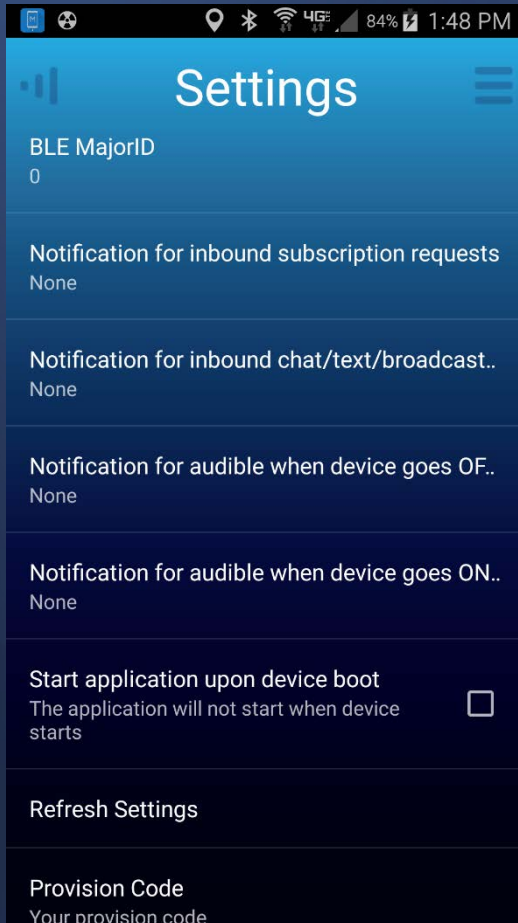

- BLE MajorID = When using BLE/iBeacons the MajorID allows the User to only listen for certain beacons
- Notifications can be set for the following:
 - Inbound Subscription Requests
 - Inbound Chat Messages
 - Device going OFFLINE
 - Device going ONLINE
- Start application upon device boot = ENABLE this Setting to have TRAX START when the device is powered on


Settings

Main Settings

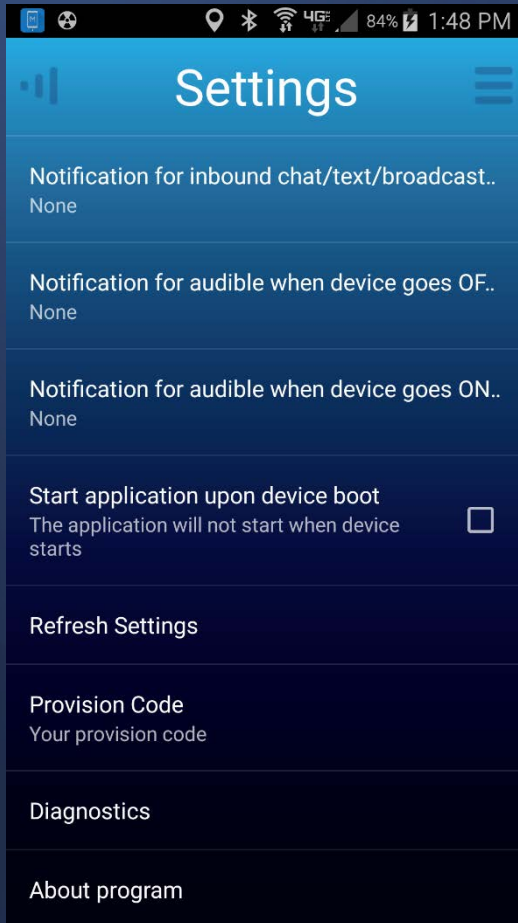


- Refresh Settings = SELECT this to RESET your Settings
- Provision Code = Code used to manage your Enterprise Settings and Versioning
- Diagnostics = Allows the User to troubleshoot connectivity issues(see next slide)
- About Program = Current TRAX Version


Settings/Diagnostics

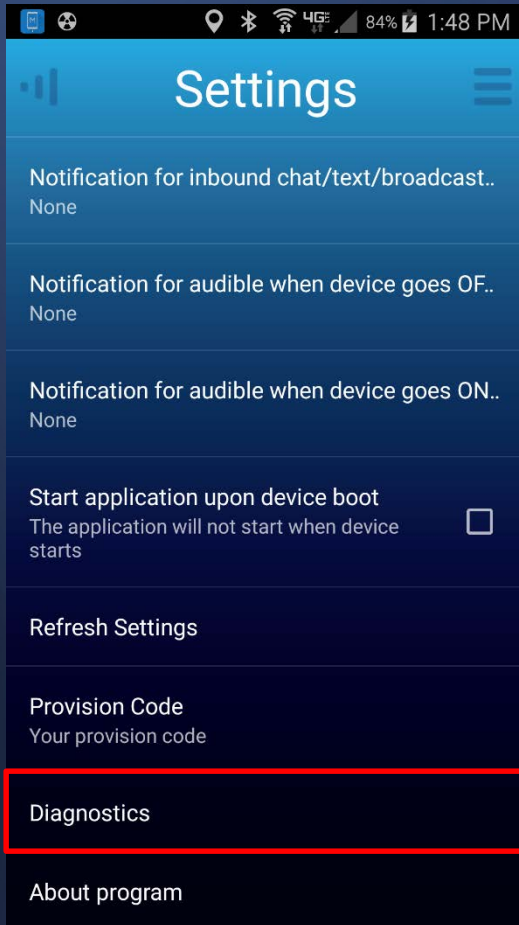


- In Settings, SELECT “Diagnostics”
- The Diagnostics Screen will appear
- SELECT “TEST”
- The Diagnostics Process will begin check for possible connectivity issues

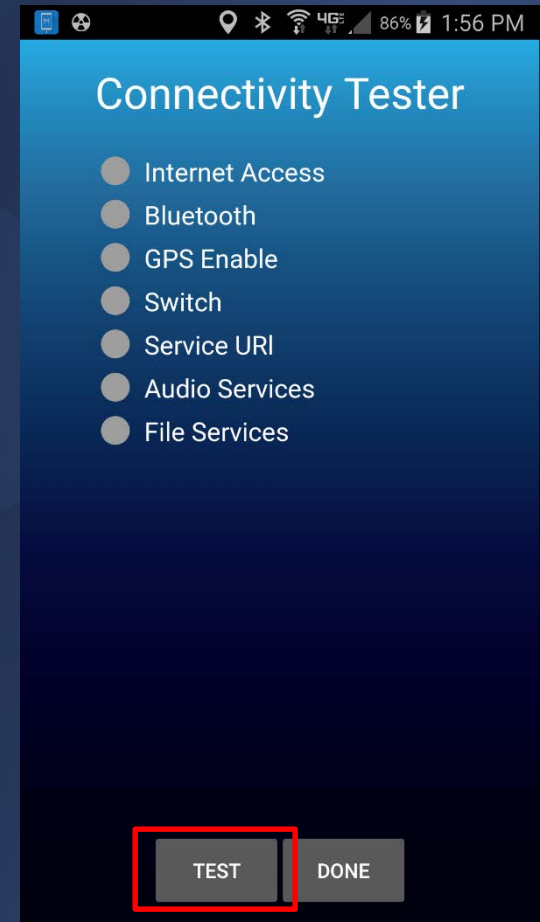


Settings/Diagnostics

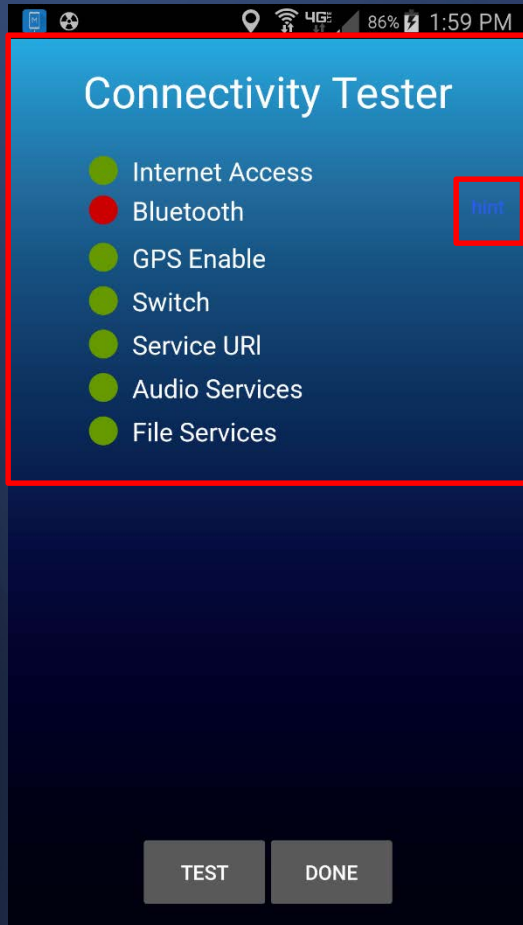

- If properly functioning, the line item will show as GREEN
- If an issue is present, the line item will show as RED
- SELECT “hint” for a recommended fix

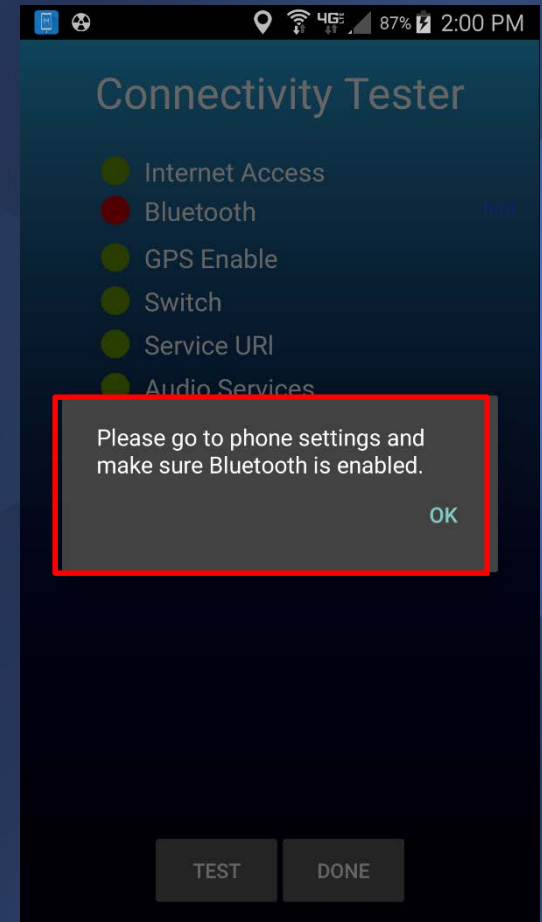


Settings - Exit Application

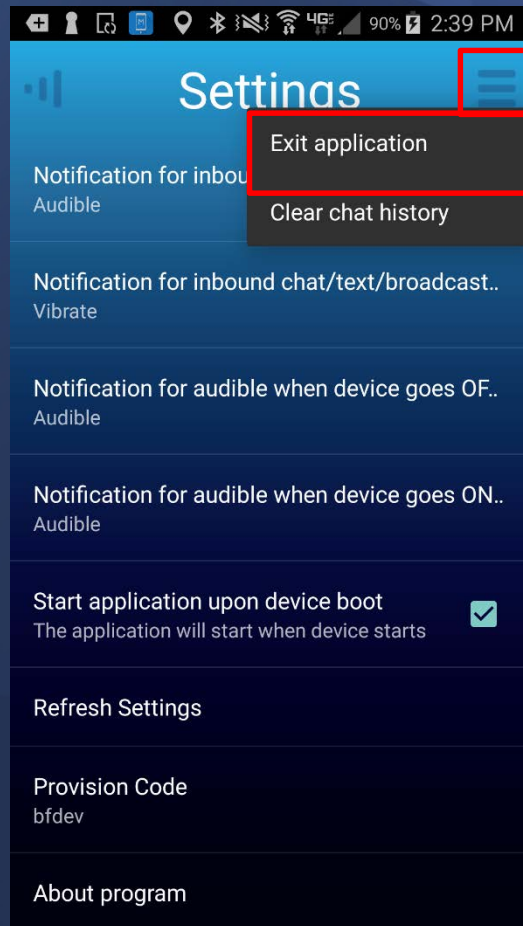

- Within Settings, SELECT the 3 horizontal lines
- SELECT “Exit Application”

Settings – Clear Chat History

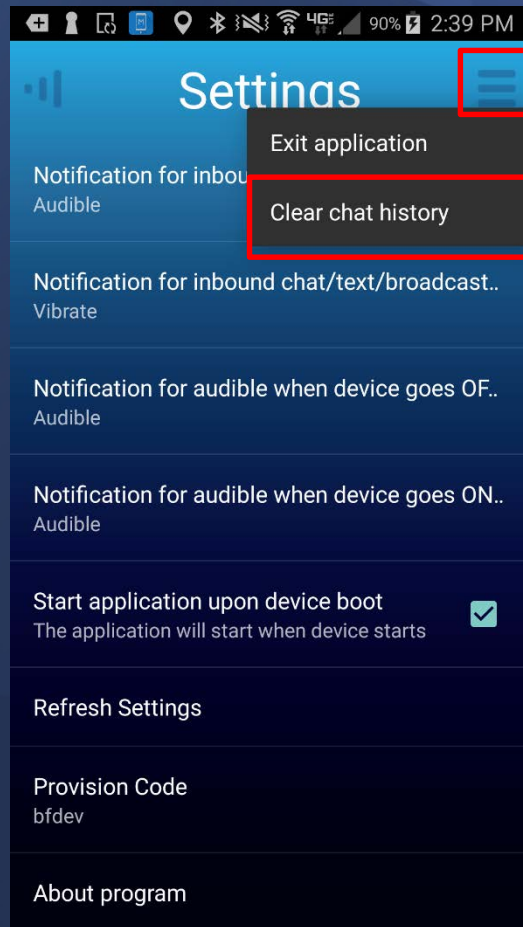

- Within Settings, **SELECT** the 3 horizontal lines
- **SELECT** “Clear Chat History”